

MPA series (Axial Lead)

Metallized Polypropylene Film Capacitors

◆ Feature

- » Low Dissipation Factor at high frequency.
- » Excellent frequency characteristics.
- » Good long term stability.
- » Moisture resistant.



◆ Application


- » Use in wave-form shaping delay & timing circuit.
- » Switching power supply input filtering.
- » DC blocking and output filter applications.
- » High current, high voltage, high frequency applications.

◆ Electrical characteristics

- » Rated Voltage : 100 / 250 / 400 / 630 VDC
- » Rated Temperature : -40 ~ +85°C
- » Capacitance Range : 0.01 to 15 uF
- » Capacitance Tolerance: $\pm 5\%$ (J) / $\pm 10\%$ (K) / $\pm 20\%$ (M)

◆ Part Number

MPA	103	K	401	A	B		
Type	Capacitance	Tolerance	Voltage	Type	Packing	Cutting	Lead Length
MPA	10nF=103	J: 5%	400V=401	A= Axial	B= Bulk		Blank=Standard
	0.47uF=474	K: 10%	630V=631		T= Tape for Reel		C=Cutting (mm)
		M: 20%					

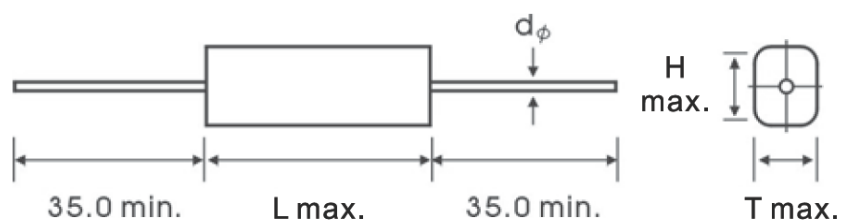


◆ Dimension (Axial-Flat)

L x H x T x d: Max. mm

Capacitance (μ F)	100 VDC	250 VDC	400 VDC	630 VDC
0.010	16.0 x 9.0 x 5.0 x 0.6	16.0 x 9.0 x 5.0 x 0.6	16.0 x 9.0 x 5.0 x 0.6	16.0 x 9.0 x 5.0 x 0.6
0.015	16.0 x 9.0 x 5.0 x 0.6	16.0 x 9.0 x 5.0 x 0.6	16.0 x 9.0 x 5.0 x 0.6	16.0 x 9.0 x 5.0 x 0.6
0.022	16.0 x 10.0 x 6.0 x 0.6	16.0 x 10.0 x 6.0 x 0.6	16.0 x 11.0 x 7.0 x 0.6	16.0 x 12.0 x 6.5 x 0.6
0.033	16.0 x 10.0 x 6.0 x 0.6	16.0 x 10.0 x 6.0 x 0.6	16.0 x 11.0 x 7.0 x 0.6	16.0 x 13.0 x 7.0 x 0.6
0.047	16.0 x 10.0 x 6.0 x 0.6	16.0 x 10.0 x 6.0 x 0.6	16.0 x 12.0 x 7.0 x 0.6	21.0 x 11.0 x 6.0 x 0.8
0.068	16.0 x 10.0 x 6.0 x 0.6	16.0 x 10.0 x 6.0 x 0.6	21.0 x 9.0 x 7.0 x 0.8	21.0 x 12.0 x 8.0 x 0.8
0.10	16.0 x 8.0 x 4.0 x 0.6	16.0 x 9.0 x 4.0 x 0.6	21.0 x 9.0 x 5.0 x 0.8	21.0 x 12.0 x 8.0 x 0.8
0.15	16.0 x 8.0 x 4.0 x 0.6	16.0 x 9.0 x 4.0 x 0.6	21.0 x 10.0 x 6.0 x 0.8	26.0 x 13.0 x 8.0 x 0.8
0.22	16.0 x 8.0 x 5.0 x 0.6	21.0 x 9.0 x 5.0 x 0.8	21.0 x 12.0 x 8.0 x 0.8	26.0 x 15.0 x 9.0 x 0.8
0.33	21.0 x 8.0 x 5.0 x 0.8	21.0 x 10.0 x 6.0 x 0.8	26.0 x 13.0 x 8.0 x 0.8	26.0 x 17.0 x 11.0 x 0.8
0.47	21.0 x 9.0 x 5.0 x 0.8	21.0 x 10.0 x 6.0 x 0.8	26.0 x 14.0 x 8.0 x 0.8	31.0 x 17.0 x 12.0 x 0.8
0.68	26.0 x 11.0 x 6.0 x 0.8	26.0 x 12.0 x 7.0 x 0.8	26.0 x 17.0 x 10.0 x 0.8	31.0 x 21.0 x 15.0 x 0.8
1.0	26.0 x 12.0 x 7.0 x 0.8	26.0 x 13.0 x 7.0 x 0.8	31.0 x 18.0 x 11.0 x 0.8	31.0 x 22.0 x 16.0 x 0.8
1.5	31.0 x 13.0 x 8.0 x 0.8	26.0 x 15.0 x 9.0 x 0.8	31.0 x 19.0 x 11.0 x 0.8	
2.2	31.0 x 14.0 x 9.0 x 0.8	31.0 x 17.0 x 9.0 x 0.8		
3.3	31.0 x 18.0 x 10.0 x 0.8	31.0 x 19.0 x 12.0 x 0.8		
4.7	31.0 x 18.0 x 11.0 x 0.8			
6.8	36.0 x 20.0 x 11.0 x 0.8			
10	36.0 x 22.0 x 12.0 x 0.8			

For enquiry on items not within the above range or with special dimensions, please contact us for availability.
All product specification and data are subject to change without notice.

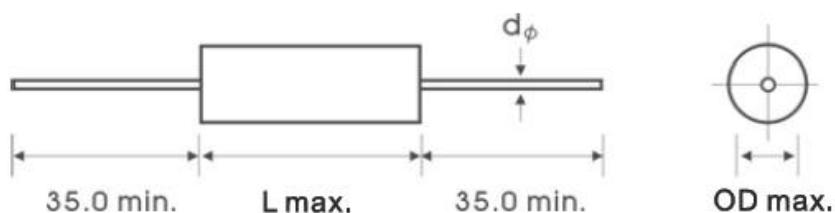

◆ Dimension (Axial-Column)

L x H x T x d: Max. mm

Capacitance (uF)	100 VDC	250 VDC	400 VDC	630 VDC
0.010	14.0 x 5.5 x 0.6	14.0 x 5.5 x 0.6	16.0 x 6.0 x 0.6	16.0 x 6.0 x 0.6
0.015	14.0 x 5.5 x 0.6	14.0 x 5.5 x 0.6	16.0 x 6.0 x 0.6	16.0 x 7.0 x 0.6
0.022	14.0 x 5.5 x 0.6	14.0 x 5.5 x 0.6	16.0 x 8.0 x 0.6	16.0 x 8.0 x 0.6
0.033	14.0 x 5.5 x 0.6	14.0 x 5.5 x 0.6	16.0 x 7.0 x 0.6	16.0 x 9.0 x 0.6
0.047	14.0 x 5.5 x 0.6	16.0 x 6.0 x 0.6	16.0 x 7.0 x 0.6	21.0 x 8.0 x 0.6
0.068	14.0 x 5.5 x 0.6	16.0 x 6.0 x 0.6	16.0 x 10.0 x 0.6	21.0 x 9.0 x 0.6
0.10	16.0 x 6.0 x 0.6	16.0 x 7.0 x 0.6	21.0 x 8.0 x 0.6	21.0 x 10.0 x 0.8
0.15	16.0 x 6.0 x 0.6	16.0 x 8.0 x 0.6	21.0 x 8.0 x 0.6	26.0 x 11.0 x 0.8
0.22	16.0 x 7.0 x 0.6	21.0 x 8.0 x 0.6	21.0 x 9.0 x 0.8	26.0 x 13.0 x 0.8
0.33	21.0 x 7.0 x 0.6	21.0 x 9.0 x 0.6	26.0 x 10.0 x 0.8	26.0 x 14.0 x 0.8
0.47	21.0 x 8.0 x 0.6	21.0 x 10.0 x 0.8	26.0 x 12.0 x 0.8	31.0 x 15.0 x 0.8
0.68	21.0 x 9.0 x 0.6	26.0 x 9.0 x 0.8	26.0 x 13.0 x 0.8	31.0 x 18.0 x 0.8
1.0	26.0 x 10.0 x 0.8	26.0 x 11.0 x 0.8	31.0 x 15.0 x 0.8	31.0 x 21.0 x 0.8
1.5	26.0 x 11.0 x 0.8	26.0 x 12.0 x 0.8	31.0 x 18.0 x 0.8	47.0 x 19.0 x 0.8
2.2	26.0 x 11.0 x 0.8	31.0 x 14.0 x 0.8	31.0 x 20.0 x 0.8	47.0 x 23.0 x 0.8
3.3	26.0 x 14.0 x 0.8	31.0 x 17.0 x 0.8	47.0 x 20.0 x 0.8	47.0 x 27.0 x 0.8
4.7	31.0 x 15.0 x 0.8	31.0 x 18.0 x 0.8	47.0 x 26.0 x 0.8	47.0 x 31.0 x 0.8
6.8	31.0 x 18.0 x 0.8	47.0 x 19.0 x 0.8	47.0 x 26.0 x 0.8	
10	31.0 x 21.0 x 0.8	47.0 x 19.0 x 0.8		
15	47.0 x 26.0 x 0.8	47.0 x 21.0 x 0.8		

For enquiry on items not within the above range or with special dimensions, please contact us for availability.
All product specification and data are subject to change without notice.