


## MET series(Axial Lead) Metallized Polyester Film Capacitors

### ◆ Features

- » Low Dissipation Factor at high frequency.
- » Excellent frequency characteristics.
- » Good long term stability.
- » Moisture resistant.

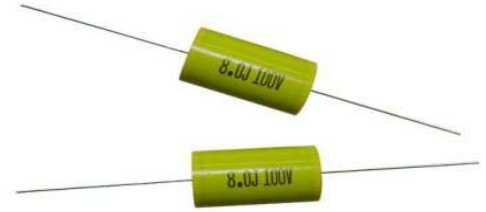

### ◆ Applications

- » Use in wave-form shaping delay timing circuit.
- » Switching power supply input filtering.
- » DC blocking and output filter applications.
- » High current, high voltage, high frequency applications..

### ◆ Construction


Non-inductive construction using metallized Polypropylene film with polyester adherent tape and the ends are filled with epoxy resin.

### ◆ Specification

- » Rated Voltage : 100 / 250 / 400 / 630 VDC
- » Rated Temperature : -40 ~ +85°C
- » Capacitance Range : 0.01 uF to 15 uF
- » Capacitance Tolerance: ±5% (J) / ±10% (K) / ±20% (M)

### ◆ Part Number

MET	103	K	401	A	B	-		
Type	Capacitance	Tolerance	Voltage	Lead	Packing	Cutting	Lead Length	
MET	10nF=103	J: 5%	400V =401	R= Radial	B= Bulk			Blank=Standard
	0.47uF=474	K: 10%	630V =631	A= Axial	T= Tape for Reel			C=Cutting (mm)
		M: 20%						

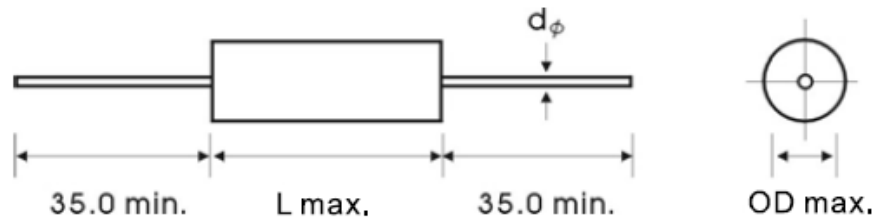

### ◆ Dimension (Axial -Column)

L x OD x d : Max. mm

Capacitance (uF)	100 VDC	250 VDC	400 VDC	630 VDC
0.01	14x5.5x0.6	14x5.5x0.6	16x6x0.6	16x6x0.6
0.015	14x5.5x0.6	14x5.5x0.6	16x6x0.6	16x7x0.6
0.022	14x5.5x0.6	14x5.5x0.6	16x8x0.6	16x8x0.6
0.033	14x5.5x0.6	14x5.5x0.6	16x7x0.6	16x9x0.6
0.047	14x5.5x0.6	16x6x0.6	16x7x0.6	21x8x0.6
0.068	14x5.5x0.6	16x6x0.6	16x10x0.6	21x9x0.6
0.1	16x6x0.6	16x7x0.6	21x8x0.6	21x10x0.8
0.15	16x6x0.6	16x8x0.6	21x8x0.6	26x11x0.8
0.22	16x7x0.6	21x8x0.6	21x9x0.8	26x13x0.8
0.33	21x7x0.6	21x9x0.6	26x10x0.8	26x14x0.8
0.47	21x8x0.6	21x10x0.8	26x12x0.8	31x15x0.8
0.68	21x9x0.6	26x9x0.8	26x13x0.8	31x18x0.8
1	21x10x0.8	26x11x0.8	31x15x0.8	31x21x0.8
1.5	26x11x0.8	26x12x0.8	31x18x0.8	47x19x0.8
2.2	26x11x0.8	31x14x0.8	31x20x0.8	47x23x0.8
3.3	26x14x0.8	31x17x0.8	47x20x0.8	47x27x0.8
4.7	31x15x0.8	31x18x0.8	47x26x0.8	47x31x0.8
6.8	31x18x0.8	47x19x0.8	47x26x0.8	
10	31x21x0.8	47x19x0.8		
15	47x26x0.8	47x21x0.8		

For enquiry on items not within the above range or with special dimensions, please contact us for availability.  
All product specification and data are subject to change without notice.