

## RMAA series


# Metal Alloy Low Resistance Chip Resistor Automotive

### ◆ Features

- » Low Resistance / Low TCR
- » Excellent long term stability
- » RoHs compliant and halogen free.
- » Lead free.
- » AEC-Q200 qualified available

### ◆ Applications

- » Power supply
- » Entertainment product
- » Measuring instrument
- » Industrial product
- » Battery management system

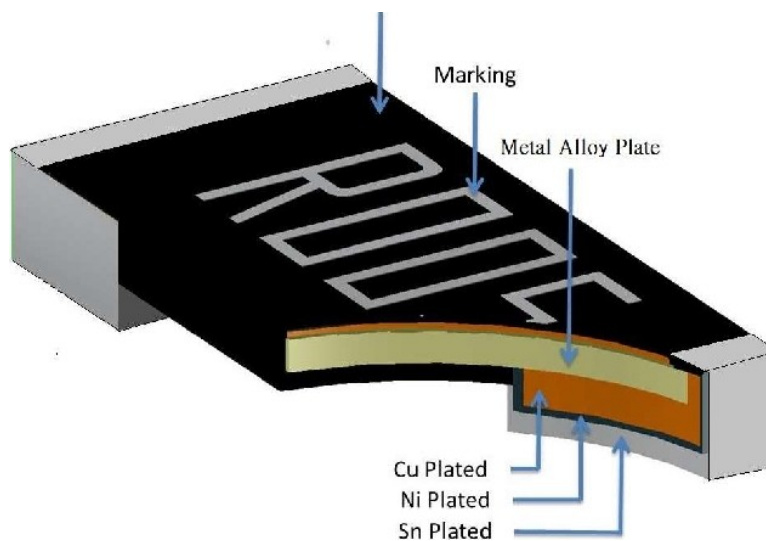


## ◆ Standard Electrical Specifications

■ Standard Electrical Specifications								
Type	Rating Power at 70°C	T.C.R. (ppm/°C)	Max. Rating Current	Max. Overload Current	Resistance Range (mΩ)		Material	Operating Temperature Range (°C)
					0.5% (D)	1.0% (F) 2.0% (G) 5.0% (J)		
1206	0.5W	≤±50	22.36	50.00	5~75	1~75	R001 : MnCuSn R002~R007 : MnCu R008~R075 : FeCrAl	-55~+170°C
	0.75W		27.38	61.23				
	1W		31.62	70.71	5~50	1~50	R001 : MnCuSn R002~R007 : MnCu R008~R050 : FeCrAl	
	1.5W		38.72	86.60	5~10	1~10	R001 : MnCuSn R002~R007 : MnCu R008~R010 : FeCrAl	
2512	1W	≤±75	44.72	100.00	---	0.5~0.8	R0005~R0008 : MnCuSn	
	1W	≤±50	31.62	70.71	5~450	1~500	R001~R006 : MnCu R007~R500 : FeCrAl	
	2W	≤±75	63.24	141.42	---	0.5~0.8	R0005~R0008 : MnCuSn	
	2W	≤±50	44.72	100.00	5~450	1~450	R001~R006 : MnCu R007~R450 : FeCrAl	
	3W	≤±75	77.45	173.20	---	0.5~0.8	R0005~R0008 : MnCuSn	
	3W	≤±50	54.77	122.47	5~100	1~100	R001~R006 : MnCu R007~R100 : FeCrAl	
2725	4W	≤±100	141.42	282.84	---	0.2	R0002~R0004 : MnCuSn R0005~R0025 : MnCu R003 : FeCrAl	
		≤±50	126.49	252.98		0.25~3		
2728	4W	≤±50	31.62	63.24	7~450	4~450	R004~R450 : FeCrAl	
4527	2W	≤±75	63.24	141.42	---	0.5	R0005 : MnCuSn	
	2W	≤±50	44.72	100.00	5~100	1~100	R001~R040 : MnCu R041~R100 : FeCrAl	
	3W	≤±75	77.45	173.20	---	0.5	R0005 : MnCuSn	
	3W	≤±50	54.77	122.47	5~60	1~60	R001~R040 : MnCu R041~R060 : FeCrAl	
	5W	≤±75	100.00	173.20	---	0.5	R0005 : MnCuSn	
	5W	≤±50	70.71	122.47	5~500	1~500	R001~R040 : MnCu R041~R500 : FeCrAl	

### ■ Jumper Specifications

Type	Rating Power at 70°C	Max. Rating Current	Resistance (mΩ)	Material	Operating Temperature Range (°C)
1206	1W	70.7A	≤0.2	Jumper : Cu	-55~+170°C
2512	2W	100A			
	3W	122A			

### ■ Type Dimension

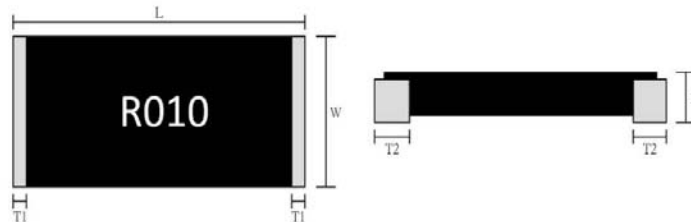

### ■ Dimension

Unit : mm

Type	Power Rating	Resistance Range	L	W	H	T1	T2
1206	0.5w 0.75W	1mΩ	3.200±0.254	1.650±0.254	0.820±0.254	0.508±0.254	0.508±0.254
		2mΩ			0.700±0.254		
		3mΩ			0.600±0.254		
		4~20mΩ			0.550±0.254		
		21~50mΩ			0.470±0.254		
		51~75mΩ			0.400±0.254		
	1W	1mΩ			0.820±0.254		
		2mΩ			0.700±0.254		
		3mΩ			0.600±0.254		
		4~20mΩ			0.550±0.254		
		21~50mΩ			0.470±0.254		
		1mΩ			0.820±0.254		
	1.5W	2mΩ			0.700±0.254		
		3mΩ			0.600±0.254		
		4~10mΩ			0.550±0.254		
2512	1W	451~500mΩ	6.350±0.254	3.050±0.254	0.350±0.254	0.750±0.254	0.850±0.254
	1W 2W	0.5mΩ			0.820±0.254	1.980±0.254	2.000±0.254
		0.75mΩ			0.700±0.254	1.150±0.254	1.980±0.254
		0.8mΩ					1.860±0.254
		1mΩ					2.200±0.254
		1.5mΩ			0.720±0.254	1.400±0.254	
		2~5mΩ			0.550±0.254	1.150±0.254	1.150±0.254
		6mΩ					1.100±0.254
		7~10mΩ					0.600±0.254
		11~75mΩ					0.600±0.254
		76~100mΩ			0.550±0.254	1.050±0.254	1.100±0.254
	101~135mΩ	0.470±0.254			0.750±0.254		
	136~200mΩ	0.400±0.254					
	201~450mΩ	0.400±0.254			0.850±0.254		

Type	Power Rating	Resistance Range	L	W	H	T1	T2	
2512	3W	0.50mΩ	6.350±0.254	3.050±0.254	0.820±0.254	1.980±0.254	2.000±0.254	
		0.75mΩ			0.700±0.254	1.150±0.254	1.980±0.254	
		0.8mΩ					1.860±0.254	
		1mΩ			2.200±0.254			
		1.5mΩ			0.720±0.254	1.400±0.254		
		2~5mΩ				1.150±0.254		
		6mΩ			0.550±0.254	0.75±0.254	1.100±0.254	
		7~10mΩ			0.600±0.254	1.150±0.254		
		11~75mΩ			0.550±0.254	0.75±0.254		
		76~100mΩ						
2725	4W	0.2mΩ	6.900±0.254	6.350±0.254	1.100±0.254	1.20±0.254		2.150±0.254
		0.25mΩ			0.950±0.254		2.287±0.254	
		0.3mΩ					1.975±0.254	
		0.35mΩ			0.850±0.254		1.710±0.254	
		0.4mΩ					1.440±0.254	
		0.5mΩ			0.650±0.254		1.15±0.254	2.080±0.254
		0.6mΩ						1.780±0.254
		0.8mΩ			0.550±0.254		1.15±0.254	1.300±0.254
		1mΩ						1.800±0.254
		1.5~1.6mΩ			6.800±0.254		1.500±0.254	
2~3mΩ								
2728	4W	4~450mΩ	6.600±0.254	6.700±0.254	0.580±0.254	0.400±0.254	1.050±0.254	
4527	2W	0.5mΩ	11.300±0.500	6.600±0.500	0.770±0.254	0.900±0.254	3.000±0.254	
		1mΩ			0.650±0.254		2.000±0.254	
		1.5~20mΩ					0.550±0.254	
		21~100mΩ			0.770±0.254			
	3W	0.5mΩ			0.650±0.254	0.900±0.254	3.000±0.254	
		1mΩ					0.550±0.254	2.000±0.254
		1.5~20mΩ						0.800±0.254
		21~60mΩ					0.680±0.254	
	5W	0.5mΩ			0.650±0.254	0.650±0.254	3.000±0.254	
		1mΩ					0.580±0.254	2.000±0.254
1.5~20mΩ								
21~500mΩ								

**■ Jumper Dimension**
**Unit : mm**


Type	Power Rating	Resistance Range	L	W	H	T1	T2
1206	1W	< 0.2mΩ	3.200±0.254	1.650±0.254	0.650±0.254	0.508±0.254	0.508±0.254
2512	2W / 3W	< 0.2mΩ	6.350±0.254	3.050±0.254	0.650±0.254	1.15±0.254	1.100±0.254

## ■ Performance Characteristics

### Power Derating Curve

The Operating Temperature Range: -55°C ~+170°C.

For resistors operated in ambient temperatures above 70°C, power rating must be derating in accordance with the curve below.

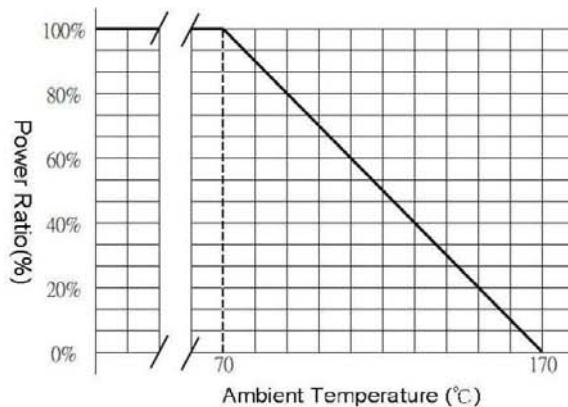

### ■ Rating Current

The following equation may be used to determine the DC (Direct Current) or AC (Alternating Current) (RMS, root mean square value) of normal rated power. However, if the result value exceeds the highest current of regulated standards (paragraph 5), the highest normal rated power is to be used.

$$I = \sqrt{P/R}$$

I = Rating current (A)  
 P = Rating Power (W)  
 R = Resistance(Ω)

### ■ Marking Format:

- All the other products marking are 4 digits.
- "R" designates the decimal location in ohms
  - e.g. 1mΩ the product marking is R001.
  - 25mΩ the product marking is R025.
  - 100mΩ the product marking is R100.
- "m" designates the decimal location in milli-ohms
  - e.g. 0.25mΩ the product marking is 0m25.
  - 0.5mΩ the product marking is 0m50.
  - 5.5mΩ the product marking is 5m50.
  - 25.5mΩ the product marking is 25m5.
- 0 Ω product marking is 0R.
- The criteria to distinguishing the mark on the surface of products are that characters can be identified.



## ◆ Specification and Test Methods

■ Reliability test and requirement			
Test Item	Test Method	Procedure	Requirements
Temperature Coefficient of Resistance (T.C.R)	JIS-C-5201-1 4.8 IEC-60115-1 4.8	At 25°C / +150°C, 25°C is the reference temperature	As Spec
Short Time Overload	JIS-C-5201-1 4.13 IEC-60115-1 4.13	The number of rated power are as follows: <ul style="list-style-type: none"> <li>• 1206-0.5W: 5 times of rated power</li> <li>• 1206-0.75W: 5 times of rated power</li> <li>• 1206-1W: 5 times of rated power</li> <li>• 1206-1.5W: 5 times of rated power</li> <li>• 2512-1W: 5 times of rated power</li> <li>• 2512-2W: 5 times of rated power</li> <li>• 2512-3W: 5 times of rated power</li> <li>• 2725-4W: 4 times of rated power</li> <li>• 2728-4W: 4 times of rated power</li> <li>• 4527-2W: 5 times of rated power</li> <li>• 4527-3W: 5 times of rated power</li> <li>• 4527-5W: 3 times of rated power for 5 seconds.</li> </ul>	<ul style="list-style-type: none"> <li>• 4527: <math>\Delta R/R1 \leq \pm 2.0\%</math></li> <li>• The others: <math>\Delta R/R1 \leq \pm 0.5\%</math></li> </ul>
High Temperature Exposure	JIS-C5201-1 4.25 IEC 60068-2-2	At 170°C for 1000 hours.	<ul style="list-style-type: none"> <li>• 4527: <math>\Delta R/R1 \leq \pm 2.0\%</math></li> <li>• The others: <math>\Delta R/R1 \leq \pm 1.0\%</math></li> </ul>
Resistance to Soldering Heat	JIS-C-5201-1 4.18 IEC-60115-1 4.18	260±5°C for 10 seconds.	$\Delta R/R1 \leq \pm 0.5\%$
Temperature Cycling	JESD22 Method JA-104	1000 Cycles (-55°C to +155°C) Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme.	$\Delta R/R1 \leq \pm 0.5\%$
Biased Humidity	MIL-STD-202 Method 103	1,000 hours; 85°C / 85% RH, 10% of operating power. Measurement at 24±4 hours after test conclusion.	$\Delta R/R1 \leq \pm 0.5\%$
Load Life (Endurance)	JIS-C-5201-1 4.25 IEC-60115-1 4.25.1	70±2°C, RCWV or Max. working voltage whichever is less for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF" .	<ul style="list-style-type: none"> <li>• 4527: <math>\Delta R/R1 \leq \pm 2.0\%</math></li> <li>• The others: <math>\Delta R/R1 \leq \pm 1.0\%</math></li> </ul>
Solderability	JIS-C-5201-1 4.17 IEC-60115-1 4.17	245±5°C for 3 seconds.	>95% coverage
Dielectric Withstanding Voltage	JIS-C5201-1 4.7	Applied 500VAC for 1 minute.	No short or burned on the appearance.
Core Body Strength	JIS-C5201-1 4.15	Central part pressurizing force : 5N , 10 seconds	No broken
Terminal Strength (SMD)	AEC Q200-006	Pressurizing force 17.7N for 60 seconds	No broken
Bending Strength	JIS-C-5201-1 4.33 IEC-60115-1 4.33	Bending once 2mm for 10 seconds	$\Delta R/R1 \leq \pm 0.5\%$ No broken
Moisture Resistance	MIL-STD 202 Method 106	T=24 hours / Cycle , 10Cycles . Steps 7a& 7b not required. Unpowered . (Figure 1)	$\Delta R/R1 \leq \pm 0.5\%$

\*Note: This test is a destructive experiment. The top protective layer is prone to damage and peculiar smell during, in the 50mR~100mR resistance test. The resistance change rate can meets the specifications.

### ■ For Jumper

Test Item	Test Method	Procedure	Requirements
Short Time Overload	JIS-C-5201-1 4.13 IEC-60115-1 4.13	4 times of rated power for 5 seconds.	$\leq 0.2m\Omega$
Temperature Cycling	JESD22 Method JA-104	1000 Cycles (-55°C to +155°C) Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme.	$\leq 0.2m\Omega$
High Temperature Exposure	JIS-C5201-1 4.25 IEC 60068-2-2	At 170°C for 1000 hours.	$\leq 0.2m\Omega$
Biased Humidity	MIL-STD-202 Method 103	1,000 hours; 85°C / 85% RH, 10% of operating power. Measurement at 24±4 hours after test conclusion.	$\leq 0.2m\Omega$
Load Life (Endurance)	JIS-C-5201-1 4.25 IEC-60115-1 4.25.1	70±2°C, RCWV or Max. working voltage whichever is less for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF" .	$\leq 0.2m\Omega$
Solderability	JIS-C-5201-1 4.17 IEC-60115-1 4.17	245±5°C for 3 seconds.	>95% coverage



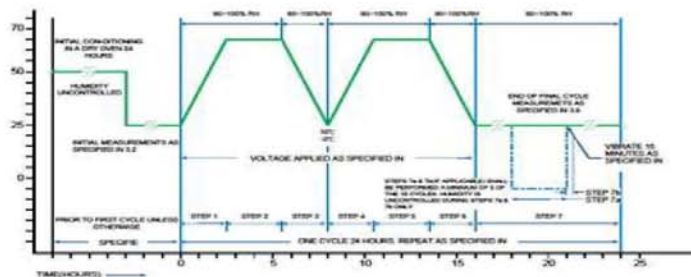


Figure 1

### ■ Soldering Profile

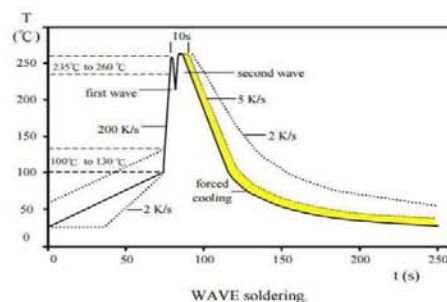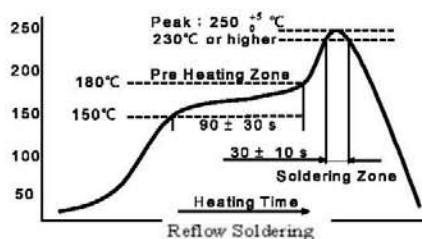

◆ **Part Number**

<u>RMAA</u>	<u>2512</u>	<u>F</u>	<u>T</u>	<u>R025</u>
Type	Size	Tolerance	Watt	R Value
RMAA	1206	D: 0.5%	U=0.5W	R000=0mR
	2512	F: 1%	Q=0.75W	R005=5.0mR
	2725	G: 2%	T=1W	R025=25mR
	2728	J: 5%	V= 1.5W	
	4527		S=2W	
			R=3W	
			A=4W	
			H=5W	