

TD series

Tantalum Solid Electrolytic Capacitors Dipped Type (Epoxy-Coated)

◆ Features


- » Lead Free, RoHS Compliant
- » Specially designed of general purpose
- » Highly reliable resin dipped type
- » Excellent frequency and temperature characteristics
- » Non-Flammable epoxy resin



◆ Specification

Item	Performance Characteristics																																																												
Operating Temperature Range	-55 to +125°C (-55 to +85°C for 4 & 6.3V)																																																												
Rated Working Voltage Range	6.3 to 50 VDC																																																												
Nominal Capacitance Range	0.1 to 330 uF																																																												
Capacitance Tolerance	±20% (±10% is available) (120Hz, +20°C)																																																												
Leakage Current	Not more than 0.008CV (uA) or 0.5uA whichever is greater																																																												
Characteristics at High and Low Temperature	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Capacitance (uF)</th> <th colspan="3">Capacitance change (%)</th> <th colspan="4">DF Max. (%)</th> <th colspan="3">DCL Max.(uF)</th> </tr> <tr> <th>-55°C</th> <th>+85°C</th> <th>+125°C</th> <th>-50°C</th> <th>+20°C</th> <th>+85°C</th> <th>+125°C</th> <th>+20°C</th> <th>+85°C</th> <th>+125°C</th> </tr> </thead> <tbody> <tr> <td>≤ 1.0</td> <td rowspan="3" style="text-align: center;">±10</td> <td rowspan="3" style="text-align: center;">±15</td> <td rowspan="3" style="text-align: center;">±25</td> <td>6</td> <td>4</td> <td>6</td> <td>6</td> <td rowspan="3" style="text-align: center;">I₀ ≤ 0.02 C_UR_U (or) 1uF (whichever is grater)</td> <td rowspan="3" style="text-align: center;">10I₀</td> <td rowspan="3" style="text-align: center;">12.5I₀</td> </tr> <tr> <td>1.5~68</td> <td>8</td> <td>6</td> <td>8</td> <td>8</td> </tr> <tr> <td>100~330</td> <td>10</td> <td>8</td> <td>10</td> <td>10</td> </tr> </tbody> </table>										Capacitance (uF)	Capacitance change (%)			DF Max. (%)				DCL Max.(uF)			-55°C	+85°C	+125°C	-50°C	+20°C	+85°C	+125°C	+20°C	+85°C	+125°C	≤ 1.0	±10	±15	±25	6	4	6	6	I ₀ ≤ 0.02 C _U R _U (or) 1uF (whichever is grater)	10I ₀	12.5I ₀	1.5~68	8	6	8	8	100~330	10	8	10	10									
Capacitance (uF)	Capacitance change (%)			DF Max. (%)				DCL Max.(uF)																																																					
	-55°C	+85°C	+125°C	-50°C	+20°C	+85°C	+125°C	+20°C	+85°C	+125°C																																																			
≤ 1.0	±10	±15	±25	6	4	6	6	I ₀ ≤ 0.02 C _U R _U (or) 1uF (whichever is grater)	10I ₀	12.5I ₀																																																			
1.5~68				8	6	8	8																																																						
100~330				10	8	10	10																																																						
Moisture Resistance	<p>Test conditions:</p> <p>Relative humidity : 90 to 95% without load</p> <p>Ambient temperature : +40°C</p> <p>Duration : 500 hours</p> <p>Post test requirements at + 20°C</p> <p>Leakage current : ≤ 0.012CV or 0.75 [μF], whichever is greater</p> <p>Capacitance change : ± 10% of initial measured value</p> <p>Tan δ : ≤ 150% of Initial specified value</p>																																																												
Endurance	<p>Test conditions:</p> <p>Derating Voltage + 125°C for 10~50V working</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>4.0</th> <th>6.3</th> <th>10.0</th> <th>16.0</th> <th>20.0</th> <th>25.0</th> <th>35.0</th> <th>50.0</th> </tr> </thead> <tbody> <tr> <td>Rated Voltage</td> <td>4.0</td> <td>6.3</td> <td>10.0</td> <td>16.0</td> <td>20.0</td> <td>25.0</td> <td>35.0</td> <td>50.0</td> </tr> <tr> <td>Voltage Derating</td> <td>2.5</td> <td>4.0</td> <td>6.3</td> <td>16.0</td> <td>13.0</td> <td>16.0</td> <td>23.0</td> <td>33.0</td> </tr> <tr> <td>Surge Voltage + 85°C</td> <td>5.0</td> <td>8.0</td> <td>13.0</td> <td>16.0</td> <td>26.0</td> <td>32.0</td> <td>46.0</td> <td>65.0</td> </tr> <tr> <td>Surge Voltage + 125°C</td> <td>3.4</td> <td>5.0</td> <td>9.0</td> <td>16.0</td> <td>16.0</td> <td>20.0</td> <td>28.0</td> <td>38.0</td> </tr> </tbody> </table> <p>Post test requirements at +20°C</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td>Leakage current</td> <td>≤ 0.01% CV or 00625 [μA], whichever is greater</td> </tr> <tr> <td>Capacitance change</td> <td>± 10% of initial measured value</td> </tr> <tr> <td>tan δ</td> <td>≤ initial specified value</td> </tr> </tbody> </table>											4.0	6.3	10.0	16.0	20.0	25.0	35.0	50.0	Rated Voltage	4.0	6.3	10.0	16.0	20.0	25.0	35.0	50.0	Voltage Derating	2.5	4.0	6.3	16.0	13.0	16.0	23.0	33.0	Surge Voltage + 85°C	5.0	8.0	13.0	16.0	26.0	32.0	46.0	65.0	Surge Voltage + 125°C	3.4	5.0	9.0	16.0	16.0	20.0	28.0	38.0	Leakage current	≤ 0.01% CV or 00625 [μA], whichever is greater	Capacitance change	± 10% of initial measured value	tan δ	≤ initial specified value
	4.0	6.3	10.0	16.0	20.0	25.0	35.0	50.0																																																					
Rated Voltage	4.0	6.3	10.0	16.0	20.0	25.0	35.0	50.0																																																					
Voltage Derating	2.5	4.0	6.3	16.0	13.0	16.0	23.0	33.0																																																					
Surge Voltage + 85°C	5.0	8.0	13.0	16.0	26.0	32.0	46.0	65.0																																																					
Surge Voltage + 125°C	3.4	5.0	9.0	16.0	16.0	20.0	28.0	38.0																																																					
Leakage current	≤ 0.01% CV or 00625 [μA], whichever is greater																																																												
Capacitance change	± 10% of initial measured value																																																												
tan δ	≤ initial specified value																																																												
Shelf Life	<p>Test conditions</p> <p>Duration : 2000 hours</p> <p>Ambient temperature : + 85°C</p> <p>Applied voltage : (none)</p> <p style="text-align: right;">Post test requirements at +20°C Same limits for "Endurance"</p>																																																												

◆ Tantalum Capacitor Dipped Typed outline Drawings

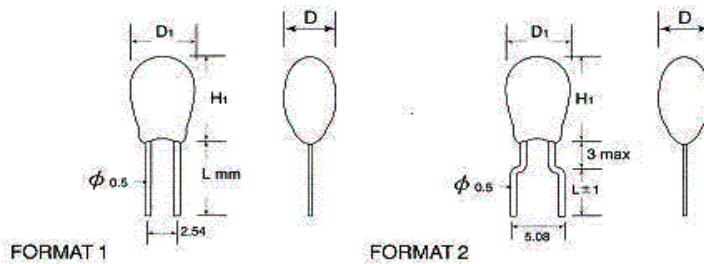

◆ Dimensions

Case Size	A	B	C	D	E	F	Wire Length (L)	(mm)	
Formats 1/2 H1 max	7.0	8.0	9.5	11.0	13.0	16.5	5.7±1	16,18±1	
D1 max	4.5	5.0	5.5	6.5	8.5	9.5	Code	A	B
D max	4.2	4.7	5.5	6.5	8.5	9.5			

◆ Rated Voltage, Capacitance

VDC	6.3	10	16	25	35	50
Code	0J	1A	1C	1E	1V	1H
Capacitance (uF)	Case Size					
0.1 (104)					A	A
0.15 (154)					A	A
0.22 (224)					A	A
0.33 (334)					A	A
0.47 (474)					A	A
0.68 (684)					A	A
1.0 (105)				A	A	B
1.5 (155)			A	A	A	C
2.2 (225)		A	A	A	B	C
3.3 (335)	A	A	A	B	B	D
4.7 (475)	A	A	B	B	C	D
6.8 (685)	A	B	B	C	D	E
10 (106)	B	B	B	C	D	E
15 (156)	B	C	C	D	E	F
22 (226)	C	C	C	D	E	F
33 (336)	C	D	D	E	F	
47 (476)	D	D	D	E	F	
68 (686)	D	D	E	F		
100 (107)	E	E	E	F		
150 (157)	E	E	F			
220 (227)	E	F				
330 (337)	F					

Tinned radial leads, Ø: 0.5mm

Leads & Solderability	temperature: 260°C
-Time of immersion:3s	-Time of immersion:3s
Standard lead spacing:2.54±0.5, 5.08± 0.5mm	The tin should cover 95% of wire surface.
Solderability:	Permissible pull test:10 N.
-Recommended soldering bath	

◆ Part Number

TD	A	475	M	016	B	I	B or T
Type	Size Code	Capacitance	Tolerance	Voltage	Wire Length	Format & Lead space	Bulk or Ammo pack

◆ Ratings and Part Number Reference

Part No.	Case size	Capacitance (uF)	DCL (uA) Max.	DF % Max.	ESR Max.(Ω) @100KHz
----------	-----------	------------------	---------------	-----------	---------------------

6.3 volt @ 85°C (4 volt,@125°C)

TDA335#006###	A	3.3	0.5	6	13.0
TDA475#006###	A	4.7	0.5	6	10.0
TDA 685#006###	A	6.8	0.5	6	8.0
TDB106#006###	B	10	0.5	8	6.0
TDB156#006###	B	15	0.8	8	5.0
TDC226#006###	C	22	1.1	8	3.7
TDC336#006###	C	33	1.7	8	3.0
TDD476#006###	D	47	2.4	8	2.0
TDD686#006###	D	68	3.4	8	1.8
TDE107#006###	E	100	5.0	10	1.6
TDE157#006###	E	150	7.6	10	0.9
TDE227#006###	E	220	11.0	10	0.9
TDF337#006###	F	330	16.6	10	0.7

10 volt @ 85°C (6.3 volt, @E 125°C)

TDA225#010###	A	2.2	0.5	6	13.0
TDA335#010###	A	3.3	0.5	6	10.0
TDA475#010###	A	4.7	0.5	6	8.0
TDB685#010###	B	6.8	0.5	6	6.0
TDB106#010###	B	10	0.8	8	5.0
TDC156#010###	C	15	1.2	8	3.7
TDC226#010###	C	22	1.7	8	2.7
TDD336#010###	D	33	2.6	8	2.1
TDD476#010###	D	47	3.7	8	1.7
TDD686#010###	D	68	5.4	8	1.8
TDE107#010###	E	100	8.0	10	1.0
TDE157#010###	E	150	12.0	10	0.8
TDF227#010###	F	220	17.6	10	0.8


16 volt @85°C (10 volt, @125°C)

TDA155#016###	A	1.5	0.5	4	10.0
TDA225#016###	A	2.2	0.5	6	8.0
TDA335#016###	A	3.3	0.5	6	6.0
TDB475#016###	B	4.7	0.6	6	5.0
TDB685#016###	B	6.8	0.8	8	4.0
TDB106#016###	B	10	1.2	8	3.2
TDC156#016###	C	15	1.9	8	2.5
TDC226#016###	C	22	2.8	8	2.0
TDD336#016###	D	33	4.2	8	1.6
TDD476#016###	D	47	6.0	8	1.3
TDE686#016###	E	68	8.7	8	1.0
TDE107#016###	E	100	12.8	10	0.8
TDF157#016###	F	150	19.2	10	0.6
TDF227#016###	F	220	19.2	10	0.6

◆ Ratings and Part Number Reference

Part No.	Case size	Capacitance (uF)	DCL (uA) Max.	DF % Max.	ESR Max.(Ω) @100KHz
25 volt @ 85°C (16 volt, @125°C)					
TDA105#025###	A	1.0	0.5	4	10.0
TDA155#025###	A	1.5	0.5	4	8.0
TDA225#025###	A	2.2	0.5	6	6.0
TDB335#025###	B	3.3	0.6	6	5.0
TDB475#025###	B	4.7	0.9	6	4.0
TDC685#025###	C	6.8	1.3	6	3.1
TDC106#025###	C	10	2.0	8	2.5
TDD156#025###	D	15	3.0	8	2.0
TDD226#025###	D	22	4.4	8	1.5
TDE336#025###	E	33	6.6	8	1.2
TDE476#025###	E	47	9.4	8	1.0
TDF686#025###	F	68	13.6	8	0.8
35 volt @ 85°C (23 volt, @125°C)					
TDA104#035###	A	0.1	0.5	4	26.0
TDA154#035###	A	0.15	0.5	4	21.0
TDA224#035###	A	0.22	0.5	4	17.0
TDA334#035###	A	0.33	0.5	4	15.0
TDA474#035###	A	0.47	0.5	4	13.0
TDA684#035###	A	0.68	0.5	4	10.0
TDA105#035###	A	1.0	0.5	4	8.0
TDA155#035###	A	1.5	0.5	4	6.0
TDB225#035###	B	2.2	0.6	6	5.0
TDB335#035###	B	3.3	0.9	6	4.0
TDC475#035###	C	4.7	1.3	6	3.0
TDD685#035###	D	6.8	1.9	6	2.5
TDD106#035###	D	10	2.8	8	2.0
TDE156#035###	E	15	4.2	8	1.6
TDE226#035###	E	22	6.1	8	1.3
TDF336#035###	F	33	9.2	8	1.0
TDF476#035###	F	47	10.0	8	0.8
50 volt @ 85°C (33 volt, @125°C)					
TDA104#050###	A	0.1	0.5	4	26.0
TDA154#050###	A	0.15	0.5	4	21.0
TDA224#050###	A	0.22	0.5	4	17.0
TDA334#050###	A	0.33	0.5	4	15.0
TDA474#050###	A	0.47	0.5	4	13.0
TDA684#050###	A	0.68	0.5	4	10.0
TDB105#050###	B	1.0	0.5	4	8.0
TDC155#050###	C	1.5	0.6	4	6.0
TDC225#050###	C	2.2	0.8	6	3.5
TDD335#050###	D	3.3	1.3	6	3.0
TDD475#050###	D	4.7	1.8	6	2.5
TDE685#050###	E	6.8	2.7	6	2.0
TDE106#050###	E	10	4.0	8	1.6
TDF156#050###	F	15	6.0	8	1.2
TDF226#050###	F	22	8.8	8	1.0

NOTE: All #016### to ambient temperature of + 20°C measured at 120Hz, 0.5V rms unless otherwise stated

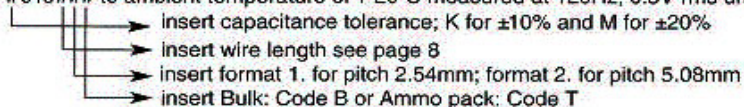

◆ Packing




Quantity per bag: Code B

The capacity of the plastic bags depends on

Case size format	Qty per bag (cut \leq 7mm)
From A to B	1000
From C to D	1000
From E to F	500

Case size format	Qty per bag (cut \leq 18mm)
From A to B	1000
From C to D	500
From E to F	500

TAPE & AMMO PACKING (conform to: IEC286-2) Code T.

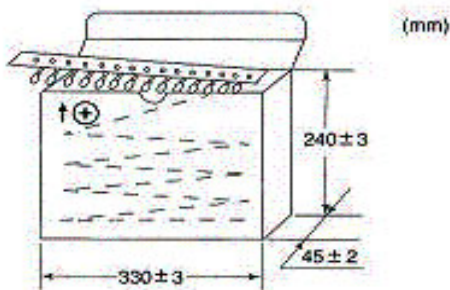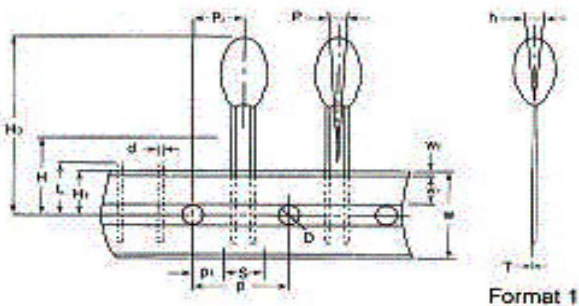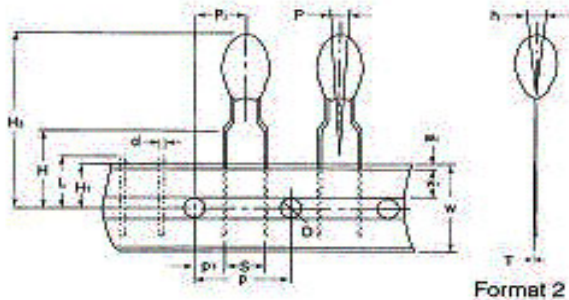

Item	Code	Dimension(mm)
Carrier tape width	W	18.0 $+1.0/-0.5$
Hold down tape width	W1	6.0 \pm 0.5
Hold down tape position	W2	1.0 max
Feed hole diameter	D	4.0 \pm 0.2
Feed hole pitch	P	12.7 \pm 0.3
Hole center to lead	P1	Format 1: 5.05 \pm 0.7 Format 2: 3.85 \pm 0.7
Hole center to component center	P2	6.35 \pm 1.0
Lead wire clenche height	H	16 \pm 0.5
Hole position	H1	9.0 \pm 0.5
Base of component height	H2	0.8 min
Component height	H3	32.2 max
Component alignment	Δ P	0 \pm 1.3
	Δ h	0 \pm 2.0
Lead spacing	S	'S' wires: 2.5 $+0.5/-0.1$ 'B' wires: 5.0 $+0.5/-0.5$
Lead diameter	d	0.5 \pm 0.05
length of snapped lead	L	11.0 max
Carrier tape thickness	T	0.5 \pm 0.1

Case Code	A~B	C~D	E~F
QTY (PCS/box)	2500	2000	1000